

# FirstBIKE

## “LOWKIT” LOWERING KIT ASSEMBLY INSTRUCTIONS



# "LOWKIT" LOWERING KIT ASSEMBLY CONTENTS

(INCLUDED IN 1 PACKAGE)

## INTRODUCTION


Thank you for purchasing the FirstBIKE "LowKit" Lowering Kit!

The "Low Kit" Lowering Kit should be used with FirstBIKE when a child's feet cannot be firmly planted on the ground, knees slightly bent, when the seat is in the lowest position.

When properly installed, the "LowKit" allows a younger child, from approximately the age of 22 months until the child is ready to ride FirstBIKE without the LowKit with the seat in the lowest position or a minimum height of 87 cm/34.3 in, to ride FirstBIKE.

The "LowKit" reduces the seat height by approximately 4 cm/1.6 in (allowing a "LowKit" adjustment range of the seat height from 29.5 cm/11.6 in to 39.5 cm/15.6 in).

For visual assembly instructions, please refer to the "**How to assemble LOWERING KIT**" video on the **SUPPORT** section of the FirstBIKE.com website located at:  
[www.firstbike.com/support](http://www.firstbike.com/support).

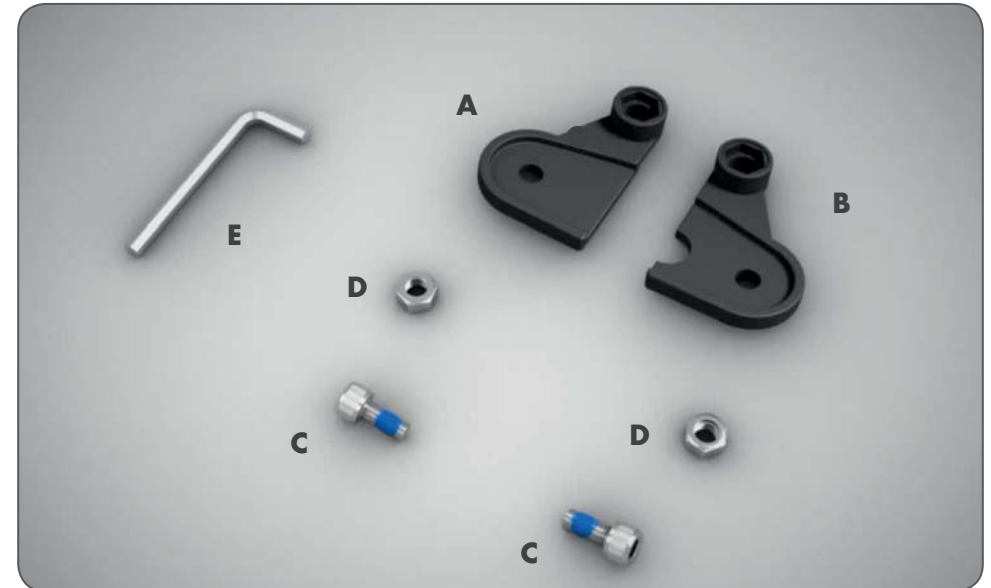

Part	Qty.	Description
A	1 pc.	Left bracket
B	1 pc.	Right bracket
C	2 pcs.	Bolt M 8 X 20
D	2 pcs.	Self-locking nut M 8
E	1 pc.	Hexagon ("Allen") wrench 6 mm (for the wheel bolt)

# ASSEMBLY INSTRUCTIONS



1. Use the hexagon (“Allen”) wrench (Part E) to remove the rear wheel nut and bolt. If the bike is equipped with a brake, leave the brake plate attached to the wheel.



2. When the frame is separated from the rear-wheel assembly, allow the frame to drop downward in order to mount the left bracket (Part A) and right bracket (Part B).

3. Position the brackets (Parts A and B) on the inside of the frame and fasten with the bolts (Parts C) and self-locking nuts (Parts D). The self-locking nuts (Parts D) should be pre-fit into the hexagonal holes.



4. Once the brackets (Parts A and B) have been mounted on both inner sides of the frame, the rear wheel can be repositioned between the brackets (Parts A and B).



5. For FirstBIKE with a brake, ensure that the extruding black “pin” on the brake assembly is firmly inserted into the “upper” hole (from two holes) of the frame prior to tightening.



6. Tighten the rear wheel nut and bolt securely using the hexagon (“Allen”) wrench (Part E).

# REMOVING THE “LOWKIT” LOWERING KIT

Once the seat has been raised 4cm/1.6 in with the “LowKit” attached, the “LowKit” Lowering Kit may be safely removed. After the “LowKit” has been removed and the FirstBIKE reassembled, you may confirm your child is ready to ride FirstBIKE without the “LowKit” by adjusting the seat to its lowest position and ensuring that your child’s feet are firmly planted on the ground with a slight bend in the knee.

1. To remove the “LowKit,” use the hexagon (“Allen”) wrench to loosen the rear wheel nut and bolt and remove the self-locking nuts (Parts D), bolts (Parts C), and brackets (Parts A and B).
2. After removing the “LowKit” parts, reassemble the rear wheel assembly by re-aligning the frame, wheel, and brake assembly (if applicable). For FirstBIKE with brake, ensure the extruding black “pin” on the brake assembly is firmly inserted in the “lower” hole (from two holes) of the frame prior to tightening.
3. Tighten the rear wheel nut and bolt securely using the hexagon (“Allen”) wrench (Part E).

# SAFETY WARNINGS



## **YOUR CHILD SHOULD ALWAYS:**

**WEAR A HELMET, SAFETY VEST, AND APPROPRIATE FOOTWEAR  
AT ALL TIMES WHILE RIDING FirstBIKE**

**RIDE FirstBIKE WHILE SUPERVISED BY AN ADULT**

**RIDE FirstBIKE IN A SAFE ENVIRONMENT FREE FROM TRAFFIC  
AND DANGEROUS TERRAIN**

## QUESTIONS?

The FirstBIKE “LowKit” Lowering Kit comes with a 5-year warranty. For the warranty details please see the last page of the bike assembly instructions.

### **REGISTER FOR WARRANTY HERE:**

**[HTTP://WWW.FIRSTBIKE.COM/SUPPORT/](http://www.firstbike.com/support/)**

If you have any questions regarding the proper assembly of FirstBIKE balance bikes or the FirstBIKE “LowKit” Lowering Kit, please contact your local distributor or e-mail us at: **[info@firstbike.com](mailto:info@firstbike.com)**.

Our international distributors can be found on internet: **[www.firstbike.com](http://www.firstbike.com)**

## **CUSTOMER SERVICE FOR USA AND CANADA:**

**The FirstBIKE Company, Inc.**

Toll Free: 1-855-MY-1-BIKE (Monday through Friday 8:30 am to 5 pm EST)  
**info@firstbike.us | www.firstbike.us**

## **CUSTOMER SERVICE FOR OTHER COUNTRIES:**

Please contact your local distributor – our international distributors can be found on  
**www.firstbike.com**

If your country is not yet listed, please contact us directly at  
**info@firstbike.com**



# **FirstBIKE**

---

FirstBIKE Worldwide B.V. | Dokweg 27/B, IJmuiden | Postbus 391 | 1970 AJ IJmuiden | The Netherlands  
**www.firstbike.com | info@firstbike.com**